


# ACTIVE BRAKE II

WITH WIRING

UP TO  
4S / 14.8V  
LIPOL

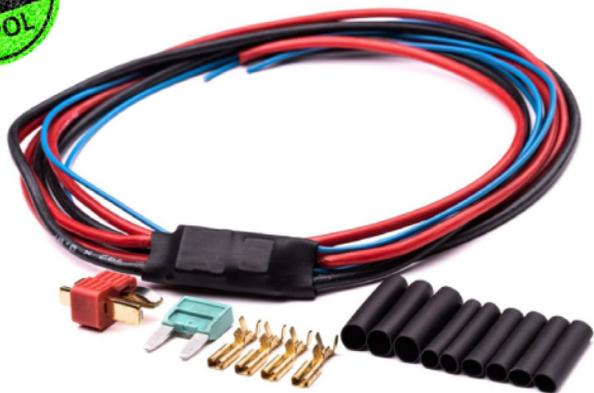

**Limitation: spring M210 (current 50A)**

This device has to install expert.

He must know how to disassemble airsoft gun and solder.

Never use soldering gun!

[www.jefftron.net](http://www.jefftron.net)



## How connect device into the gun

- 1) Red wire lead to the battery positive (leads with black wire)  
Add fuse on this wire close to the battery (included in package)
- 2) Black wire lead to the battery negative (leads with red wire)
- 3) Red wire lead to the motor positive (leads with blue wires)
- 4) Black wire lead to the motor negative (leads with blue wires)
- 5) Blue wire lead to the one trigger contact in the mechabox
- 6) Blue wire lead to the another trigger contact in the mechabox

Be extra sure to connect wires appropriately, otherwise you could destroy the device, weapon or battery.

