


MICRO MOSFET II

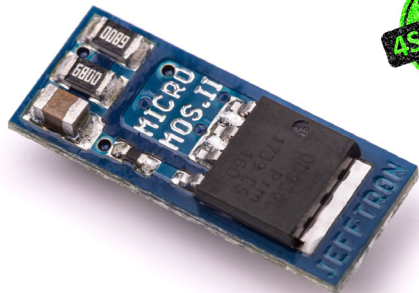

UP TO
4S / 14.8V
LIPOL

Limitation: spring M160 (current 25A)

This device has to install expert.
He must know how to disassemble airsoft gun and solder.
Never use soldering gun!

www.jefftron.net



How connect device into the gun

- 1) Black wire with max. 1,5 qmm lead to the battery negative (**B**)
- 2) Black wire with max. 1,5 qmm lead to the motor negative (**M**)
- 3) Blue wire with max. 0,5 qmm lead to one trigger contact (**S**)
- 4) Red wire lead to the battery positive and motor positive. It has to be connected to another trigger contact in the gearbox (thin wire is OK). Add fuse on this wire close to the battery.

Be sure to connect wires appropriately, otherwise you could destroy device. Test the functionality of device, drag heat shrink tube (in package) over the device and shrink it by hot air gun.

